



Ming Feng Lighting Co.,Ltd

Address: 2nd Floor, Building 2, Zao San Street 5th, Dongcheng District, Dongguan City, Guangdong province, China

Tel: 0086-769-2332-0862 **Fax:** 0086-769-2332-0862

Email address: mf@mingfeng-lighting.com



LED Tri-proof light

APPLICATION:



Item No.

MF36-1160

Optical Data

Electrical Data

LED Type	Everlight SMD chip	Power Supply	CE driver
System Efficacy	130lm/W(CCT=5000K)	Input Voltage	100~240VAC
Luminous Flux	5200lm(CCT=5000K)	Power Frequency	50~60Hz
CCT	3000K/4000K/5000K/6000K	Output Voltage	28.8~48VDC
Beam Angle	120°	Output Current	1.4A(Constant Current)
CRI	Ra80	Power Efficiency	>90%
System Efficiency	>90%	Power Factor	>0.94
		Total Harmonic Distortion	<10%


Others

System Power Consumption	40W	Junction Temperature(Tj)	<65°C(Ta=25°C)
LED Power Consumption	36W	Storage Temperature	-40~+70°C
Fixture Material	ABS Difusor Material Polycarbonate Acid	Operating Temperature	-30~+50°C
Ingress Protection	IP65	Operating Humidity	15~90%RH
Luminaire Net Weight	1.5±0.3kg	Dimensions	L1200XW95XH80mm
Life Span	>80000Hrs(Ta=25°C@L70)	Export Carton Size	1250X243x248mm,4PCS/CTN

Optional Info.


Installation Method	Ceiling/ Hang Mounting
Fixture Color	Grey
Intelligent Control	N/A

Physical Dimensions

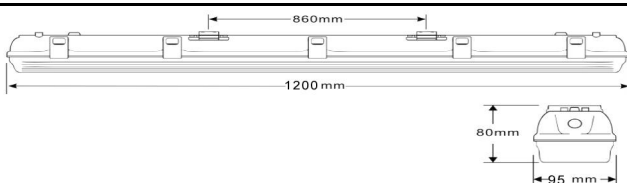

Light Distribution Curve

H25201-120° PC



Packing

