


MF 3.5" COB Down Light Specification

Model NO.:MF-E350113

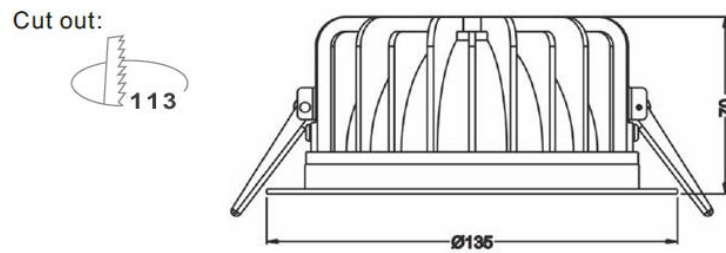

Fixed COB Series

UGR:19 KN<10% CRI>83



IEC62031
IEC60598-1
IEC60598-2
IEC61347
Comply with Energy Star SSL

ErP CE



CREE

LIFUD




Product SPEC:

Input voltage	220-240Vac, 50hz/60hz
Product Size	D135*70mm
Cut out Size	∅ 113mm
Power(watt)	12W/ 16W
Color temperature	3000K / 4000K / 6000K
LED Chip	Cree COB/ Epistar COB
LED Driver	Lifud (IP44) / Meanwell (IP65)
PF	≥0.95
Housing Colour	White RAL9003
Luminous Flux (lm)	12W: 900lm@3000K, 1000lm@4000K, 1100lm@5000K 16W:1300lm@3000K, 1400lm@4000K, 1500lm@5000K
CRI (Ra)	>83
Lifespan	≥50000hrs
Beam Angle	40°
Material	Aluminum
Operating Temperature	-20°C ~50°C
Dimmable	Y
IP	IP44/IP65
Certificate	CE/ RoHS
Warranty Period	5 years


Package:




Packing Size: (CM)



16(D1)*16 (F1)* 9cm(H1)/PCS
N.W: 0.50KG, G.W:0.64 KG

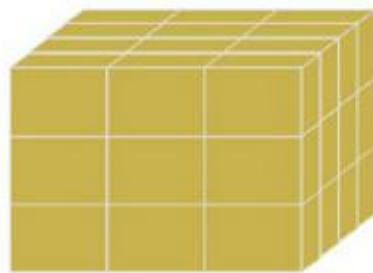

24PCS/CTN

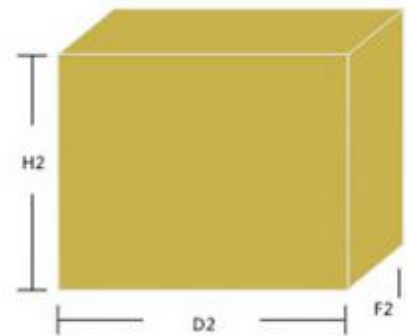

56(D2)*36(F2)*40.5cm(H2)/24PCS
N.W: 15.7KG, G.W: 16.7KG

Job reference photos from Ming Feng

