


MF 5" COB Down Light Specification

Model NO.:MF-E500162

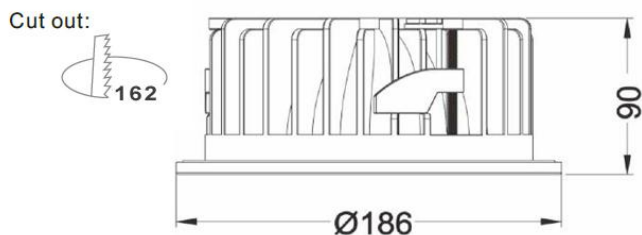

Fixed COB Series

UGR:19 KN<10% CRI>83



IEC62031
IEC60598-1
IEC60598-2
IEC61347
Comply with Energy Star SSL

ErP CE




Product Parameters:

| | |
|------------------------------|---|
| Input voltage | 220-240Vac, 50hz/60hz |
| Product Size | D186*90mm |
| Cut out Size | Φ 162mm |
| Power(watt) | 22W/30W |
| Color temperature | 3000K / 4000K / 5000K |
| LED Chip | Cree COB/ Epistar COB |
| LED Driver | Lifud (IP44) / Meanwell (IP65) |
| PF | ≥0.90 |
| Housing Colour | White RAL9003 |
| Luminous Flux (lm) | 22W: 1870lm@3000K, 1900lm @4000K, 2100lm@5000K 30W: 2550LM@3000K, 2600LM@4000K, 2700LM@5000K |
| CRI (Ra) | ≥83 |
| Lifespan | ≥50000hrs |
| Beam Angle | 40° |
| Material | Aluminum |
| Operating Temperature | -20°C ~50°C |
| Dimmable | Available |
| Protection grade | IP20, IP44, IP65 for optional |
| Certificate | CE/ RoHS |
| Warranty Period | 5 years |


Package:




Packing Size: (cm)



20(D1)*21 (F1)*10cm(H1)/PCS
N.W: 1.05KG, G.W: 1.32KG

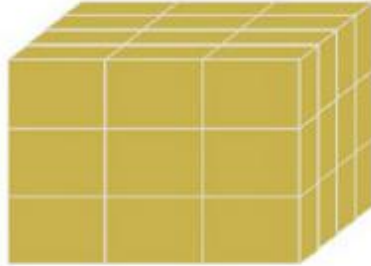

12PCS/CTN

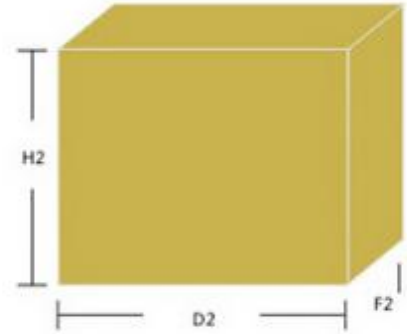

44(D2)*42.5(F2)*32.5cm(H2)/CTN
N.W: 15.0KG, G.W: 15.3KG

Job reference photos from Ming Feng

